


	x_1	x_2	q_1	q_2	$D'q_1$	$D'q_2$	r_1	s_1	r_2	s_2	q	Dq	r	s
R	0	0	0	0	0	0	?	0	?	0	0	0	?	0
	0	0	0	1	0	0	?	0	1	0	0	0	?	0
	0	0	1	0	0	0	1	0	?	0	0	1	0	1
	0	0	1	1	0	0	1	0	1	0	1	0	1	0
S	0	1	0	0	0	0	?	0	?	0	1	1	0	?
	0	1	0	1	0	1	?	0	0	?	0	0	?	0
	0	1	1	0	1	1	0	?	?	0	?	?	?	?
	0	1	1	1	1	1	?	?	?	?	?	?	?	?
U	1	0	0	0	0	1	?	0	0	1	0	0	1	0
	1	0	0	1	1	0	0	1	1	0	0	0	1	0
	1	0	1	0	1	1	0	?	0	1	0	0	1	0
	1	0	1	1	0	0	1	0	1	0	0	0	1	0
D	1	1	0	0	1	1	?	0	1	0	0	0	1	0
	1	1	0	1	0	0	?	0	1	0	0	0	1	0
	1	1	1	0	0	1	1	0	0	1	0	0	1	0
	1	1	1	1	1	0	0	?	1	0	0	0	1	0

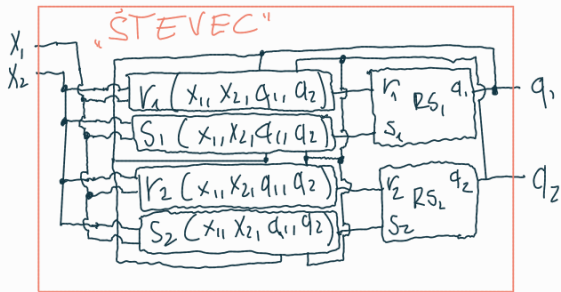


$$R_1(x_1, x_2, q_1, q_2) = \bar{x}_1 \bar{x}_2 \vee x_1 \bar{x}_2 q_1 q_2 \vee x_1 x_2 q_1 \bar{q}_2$$

$$S_1(x_1, x_2, q_1, q_2) = x_1 \bar{x}_2 \bar{q}_1 q_2 \vee x_1 x_2 \bar{q}_1 \bar{q}_2$$


$$R_2(x_1, x_2, q_1, q_2) = \bar{x}_1 \bar{x}_2 \vee x_1 q_2$$

$$S_2(x_1, x_2, q_1, q_2) = x_1 \bar{q}_2$$


pomožno vezje r1:

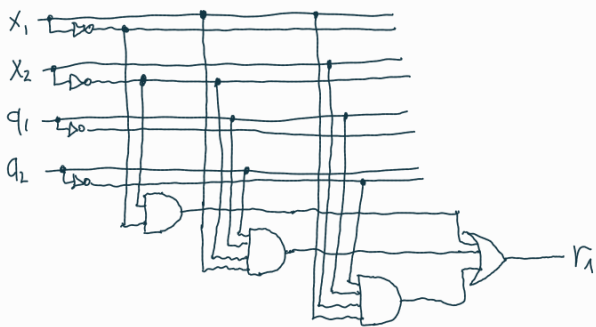

pomožno vezje s1:

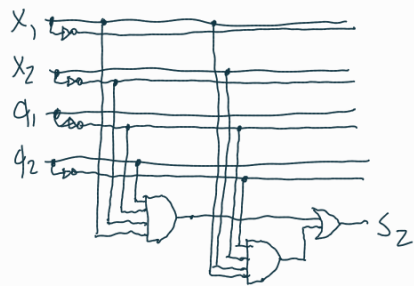

pomožno vezje r2:



pomožno vezje s2:

